## Patent Abstracts of Japan

PUBLICATION NUMBER : JP59017894
PUBLICATION DATE : 30-01-84
APPLICATION NUMBER : JP820125472
APPLICATION DATE : 19-07-82

VOL: 8 NO: 103 (E - 244)
AB. DATE : 15-05-1984 PAT: A 59017894

AB. DATE : 15-05-1984 PAT: A 59017 PATENTEE : PIONEER KK

INVENTOR : ISHIZUKA KAZUNORI


INT.CL. : H02P7/28

PATENT DATE: 30-01-1984

TITLE : CONTROL DEVICE FOR

PROPORTIONAL CURRENT CONTROL

TYPE DCMOTOR

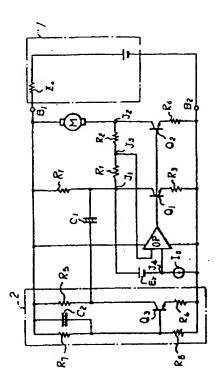

**ABSTRACT** 

: PURPOSE:To suppress the ripple component for a power source by superposing the ripple component of the power source inverted in phase on the voltage drop due to proportional resistor. CONSTITUTION:An inverting amplifier 2 inverts the phase, amplifies and outputs the ripple components produced at the power supply terminal B1 due to the internal impedance Z0 of a DC power source 1 and the load variation in the DC motor M. This output voltage is supplied through an AC coupling capacitor C1 to the terminal J1 of a proportional resistor RT. An operational amplifier OP controls transistors Q1, Q2 in response to the deviation between the potential difference between the terminal J1 and J2 varying in response to the variation in the load of the DC motor and a reference voltage. In this manner, the ripple voltage capable of being produced on power supply terminal B1 of the sufficiently suppressed.